


ABESCA ET100R

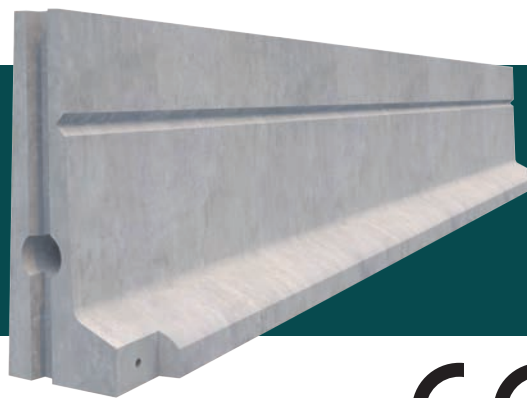

ABESCA ET100R - ET100LUX REDIRECTIVE BARRIER FOR TUNNEL

Road safety barrier 1.0 m high, H2 containment level. Placed on asphalt or concrete support

T

he barrier has a redirective profile used for the protection of tunnels, retaining walls and overpass piles.

The barrier is equipped with LED lighting systems.



TECHNICAL FEATURES	ET100R
BARRIER	ET100R
LENGTH	6,19 m
HEIGHT	100 cm
BASE	43 cm
WEIGHT	3300 kg
ANCHORED BARRIER	X
ANCHORED TERMINALS	X
CE CERTIFICATION	✓

CRASH TEST - EN 1317	ET100R
ASI	C
CONTAINMENT LEVEL	H2
NORMALIZED WORKING WIDTH	W1
NORMALIZED DYNAMIC DEFLECTION	0,1 m
NORMALIZED VEHICLE INTRUSION	VI1
TEST LENGTH INCLUDING TERMINAL	78 m