


# ABESCA H120 FAST

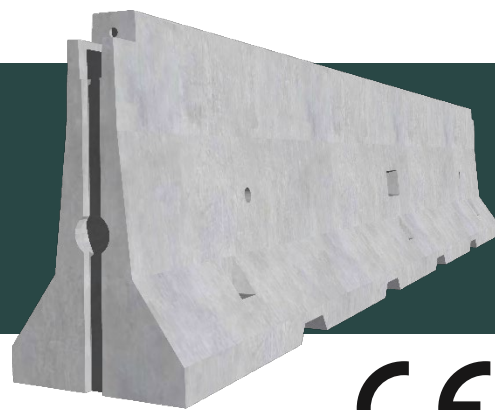

CE

## ABESCA H120 FAST – H2 – W4

### SINGLE LINE BARRIER FOR CENTRAL RESERVE AND SIDE EDGE

Concrete road safety barrier 1.20 m high, H2 containment level.

Placed on asphalt the barrier can be used to protect road construction sites thanks high safety performances.

FAST connection system allows quick installation, easy removable and replacement in case of impact.

All Abesca concrete barriers are made with polymer fibers which prevent fragments detaching due vehicle impact.



| TECHNICAL FEATURES               | H120 FAST – H2 – W4 |
|----------------------------------|---------------------|
| BARRIER                          | H120 FAST           |
| LENGTH                           | 5.99 m              |
| HEIGHT                           | 120 cm              |
| BASE                             | 66 cm               |
| WEIGHT                           | 4900 kg             |
| ANCHORED BARRIER                 | X                   |
| ANCHORED TERMINALS               | X                   |
| CE CERTIFICATION                 | ✓                   |
| CRASH TEST - EN 1317             | H120 FAST – H2 – W4 |
| ASI                              | B                   |
| CONTAINMENT LEVEL                | H2                  |
| NORMALIZED WORKING WIDTH         | W4                  |
| NORMALIZED DYNAMIC DEFLECTION    | 0.6 m               |
| NORMALIZED VEHICLE INTRUSION     | VI3                 |
| TEST LENGTH (EXCLUDING TERMINAL) | 60 m                |