


ABESCA H120 FAST

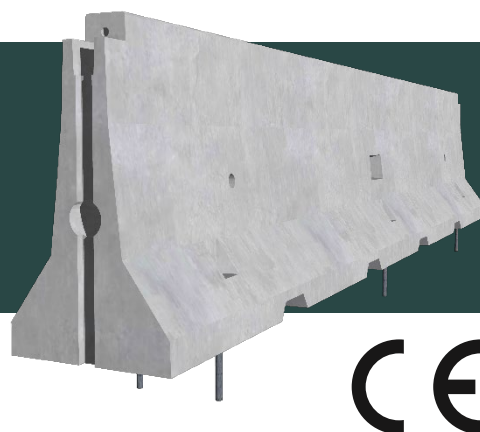

CE

ABESCA H120 FAST CONCRETE – H4b – W2

SINGLE LINE BARRIER FOR CENTRAL RESERVE AND SIDE EDGE

Concrete road safety barrier 1.20 m high, H4b containment level.

Anchored on concrete curb by 6 anchors (**max. insertion 120 mm**)

FAST connection system allows quick installation, easy removable and replacement in case of impact.

All Abesca concrete barriers are made with polymer fibers which prevent fragments detaching due vehicle impact.



TECHNICAL FEATURES	H120 FAST – H4b – W2 CONCRETE
BARRIER	H120 FAST
LENGTH	5.99 m
HEIGHT	120 cm
BASE	66 cm
WEIGHT	4900 kg
ANCHORED BARRIER	✓
ANCHORED TERMINALS	✓
CE CERTIFICATION	✓
CRASH TEST - EN 1317	H120 FAST – H4b – W2 CONCRETE
ASI	B
CONTAINMENT LEVEL	H4b
NORMALIZED WORKING WIDTH	W2
NORMALIZED DYNAMIC DEFLECTION	0,1 m
NORMALIZED VEHICLE INTRUSION	VI7
TEST LENGTH (EXCLUDING TERMINAL)	72 m